

TRINITY SALES & SERVICES

Unit No. 6 & 7, Gulmohar Bldg. Agarwal Greenways Complex, Mahajan Wadi, Near Dahisar Check post N.H. 8, Mira Road (E),
Pin : 401104. Maharashtra, India. ☎ Off.: 9122 28969255 | 9187. Mob.: 9322278159 | 9833268605 | 9833613011
✉ sales.autooneindia.com | tss_trinity@yahoo.com 🌐 www.autooneindia.com

Index

- 1) Wheel Alignment machines
- 2) Wheel Balancer machine
- 3) Tire Changer.
- 4) Nitrogen generator / Air Inflator
- 5) Vehicle Diagnostics Scanners
- 6) PUC machines(petrol and diesel)
- 7) Vehicle lifting machines.
- 8) Vehicle Washing machines and washing Lifts.
- 9) Automatic car & Bus washing Machines.
- 10) Steam Cleaners and Vacuums Cleaners
- 11) Cleaning and detailing Chemicals.
- 12) Body Shop Equipment's
- 13) Air Conditioning equipment and tools.
- 14) Fuel Injectors and Carbon Cleaners
- 15) Jacks/tools/pneumatic tools/ compressors /electrical equipment's. etc.

3D WHEEL ALIGNMENT SYSTEM

MODEL :- EXACT 3D



Feature



Reinforced lateral beam



Waterproof targets



Vehicle position auto adjustment



Super-large vehicle database



5.0M pixel japan imported cameras



1.2 Meter measure height range



Push vehicle compensation



Install-and-work! Do NOT need calibration.

Specification

Item	Precision	Range
Front Total Toe-in	$\pm 0.02^\circ$	$\pm 20^\circ$
Camber	$\pm 0.01^\circ$	$\pm 20^\circ$
Caster	$\pm 0.02^\circ$	$\pm 20^\circ$
SAI/KPI	$\pm 0.02^\circ$	$\pm 20^\circ$
Setback	$\pm 0.02^\circ$	$\pm 5^\circ$
Tread	$\pm 2\text{mm}$	
Wheelbase	$\pm 2\text{mm}$	

Note: The above accuracy can be confirmed only when the user follows the specified operation procedures as instructed in the user manual.

Requirements on Surroundings

Ambient Temperature - $20^\circ\text{C} \sim +50^\circ\text{C}$
Relative Humidity $\leq 90\%$



Auto-One 3D wheel aligner is stable, accurate, low cost, and easy-to-maintain 2 camera system wheel aligner. specially designed for clients who need to expand their business with high performance equipment requirement. This product has outstanding & unique features and the most advanced technology to ensure the growth of your company.

Auto-One 3D wheel aligner is a break through of the current 3D wheel alignment technology, suitable for car manufacturer workshops, Independent Workshops or tire service shops with a high amount of wheel alignments at an affordable cost.

Professional

- ▶ Dual camera system (imported from Japan)
- ▶ 32 inch TV monitor
- ▶ Dual-core CPU computer system
- ▶ Waterproof targets*
- ▶ 24 inch clamps
- ▶ Calibration Free*
- ▶ Up to 120cm lifting range
- ▶ Auto lift platform compensation
- ▶ Auto vehicle compensation
- ▶ Super-large vehicle database

Stable

- ▶ Reinforce structure of lateral beam to ensure accuracy in different temperature

Durable

- ▶ Waterproof targets
- ▶ Long life high-speed camera system

Affordable

- ▶ Camera interchangeable
- ▶ Free vehicle database update twice a year



* Calibration Free

Calibration of the Auto-One 3D wheel aligner system is done in the factory, does not need onsite calibration on installation. this outstanding feature saves a lot of work and makes installation of the equipment very easy.

* Waterproof targets

The targets plates are well sealed to ensure and avoid any drop of water from entering the targets.


INSTALLATION

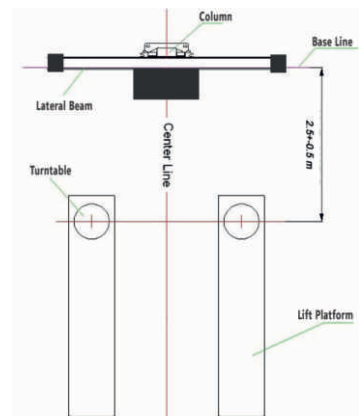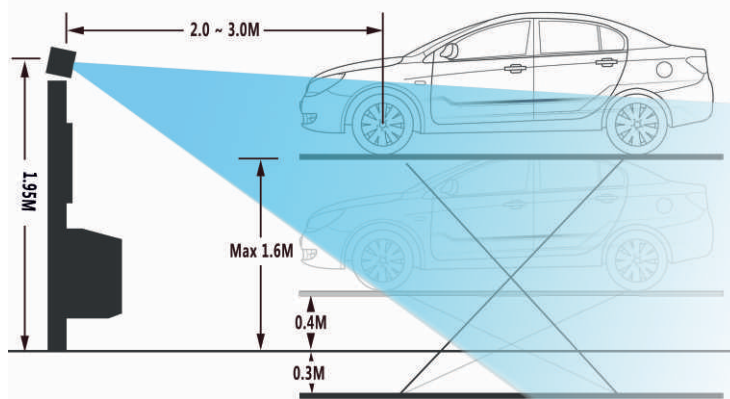

ACCESSORIES



Big size turntable

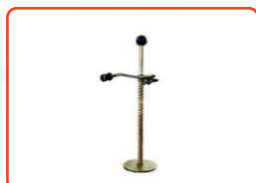

Steering Wheel Holder



Break pedal depressor



24-inch wheel clamps

*In view of our policy of continuous Research & Development on our product, Trinity Sales & Service reserve the right to alter specification or design without prior notice and liability.



TRINITY SALES & SERVICES

Admin & Works : Unit No 2, Nikisha Industrial Estate, Pandurang wadi, Behind Samrat Hotel, National Highway no 8, Near Dahisar Check Naka, Dist Thane - 400107, Maharashtra, India

Regd. Office : E/603, Yudhistir Bldg., N.L. Complex, Anand Nagar, Dahisar (East), Mumbai - 400 068.

Telephone : 022 28453297 | 022 28453472, **Mobile :** 9833268605 | 9322278159 | 9833613011

Web-Site : www.autoonetrinity.com | www.trinitysales.tradeindia.com | www.indiamart.com/trinitysales

E-mail : sales@autoonetrinity.com / tss.trinity@yahoo.com



COMPUTERIZED WHEEL ALIGNER (CCD-RF)



Auto-One CCD wheel aligner is stable, accurate, low cost, and easy-to-maintain 8 CCD wheel aligner, specially designed for clients who need to expand their business. With featured zigbee wireless data transfer technology, Auto-One CCD is more Stable and advanced than bluetooth or 433MHz RF equipped wheel aligners.

Professional

- ▶ High accuracy
- ▶ 6 meter wheel base
- ▶ 8 toe sensors
- ▶ Fast & stable data transfer
- ▶ 24 inch clamps
- ▶ Super large databank

Affordable

- ▶ Best price/performance ratio

Flexible

- ▶ PC-free mode
- ▶ Automatic detect low chassis
- ▶ Interchangeable sensor heads
- ▶ Two wheel mode(Front)

Specification


Item	Precision	Range
Front Total Toe-in	$\pm 4' (\pm 0.02^\circ)$	$\pm 20^\circ$
Camber	$\pm 2' (\pm 0.01^\circ)$	$\pm 20^\circ$
Caster	$\pm 6' (\pm 0.1^\circ)$	$\pm 20^\circ$
SAI/KPI	$\pm 6' (\pm 0.1^\circ)$	$\pm 20^\circ$
Setback	$\pm 2' (\pm 0.03^\circ)$	$\pm 5^\circ$
Thrust Angle	$\pm 2' (\pm 0.03^\circ)$	$\pm 6^\circ$

Note: The above accuracy can be confirmed only when the user follows the specified operation procedures as instructed in the user manual.

Requirements on Surroundings

Ambient Temperature - $20^\circ\text{C} \sim + 50^\circ\text{C}$
Relative Humidity $\leq 90\%$


Accessories



Turntable



Steering Wheel Holder




Break pedal depressor



24-inch wheel clamps

FEATURE

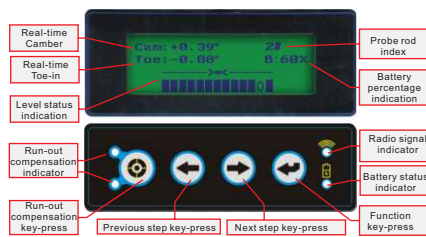


- ▶ Smart key
- ▶ LCD display
- ▶ Real-time toe-in, camber display
- ▶ Level indicator
- ▶ Battery percentage display
- ▶ Battery status indicator
- ▶ Low Battery warning light
- ▶ Radio signal status indicator



- ▶ 3600 line ccd, 8beam ccd infrared optical sensors with highest precision
- ▶ Sensors made in "FINLAND"



- ▶ Adjustment indicator on sensor head



- ▶ Calibration value backup in sensor heads
- ▶ Modularized structure, Components replaceable without calibration
- ▶ Zigbee wireless communication Technology

Available Model: exact100 for two wheel alignment system
exact400 for four wheel alignment system
exact4000H for Heavy Vehicles




- ▶ Quick measurement
- ▶ Standard measurement
- ▶ Extension measurement
- ▶ Turn angle measurement
- ▶ Customer database
- ▶ Low chassis auto-detect
- ▶ Lift platform compensation
- ▶ X-large database
- ▶ Adjustment reference database




Zoom in function

- ▶ Enlargeable indication area helps to easy monitor of the data during adjustment



Animation & audio guide

- ▶ Instructed operation guide, help ease the pain of training.
- ▶ Audio guide ensure more



Lift rack compensation

- ▶ Scissor lifts and four post lift are not always balanced, lift rack compensation ensure the accuracy of alignment.



Easy Calibration

- ▶ Four steps required to perform calibration work, in less than 10 minutes.

*In view of our policy of continuous Research & Development on our product. Trinity Sales & Service reserve the right to alter specification or design without prior notice and liability.



TRINITY SALES & SERVICES

Admin & Works : Unit No 2, Nikisha Industrial Estate, Pandurang wadi, Behind Samrat Hotel, National Highway no 8, Near Dahisar Check Naka, Dist Thane - 400107, Maharashtra, India

Regd. Office : E/603, Yudhistir Bldg., N.L. Complex, Anand Nagar, Dahisar (East), Mumbai - 400 068.

Telephone : 022 28453297 | 022 28453472, **Mobile :** 9833268605 | 9322278159 | 9833613011

Web-Site : www.autoonetrinity.com | www.trinitysales.tradeindia.com | www.indiamart.com/trinitysales

E-mail : sales@autoonetrinity.com / tss.trinity@yahoo.com



WHEEL BALANCER

Model : AO-DIGIBAL 100



Technical Data

Max.Wheel RIM Dia : 10" to 24"
Max.Wheel RIM With : 1.5" to 12"
Max.Wheel Distance : 25 to 300 MM
Max.Wheel Weight : 65 Kg.
Resolution
Fine Mode : 1 GM
Normal Mode : 5 GM
RE Clamping Accuracy : 10 to 15 GM (Up to 14" Wheel)
Position Accuracy Deg : 2.9
Balance Speed : 190 RPM
Motor : 0.5 HP / Single Phase / 960 RPM
Power Supply : 230V A/c. +/- 10%
15" Super VGA Monitor
Five Mode of Alloy Wheel Function
Self Calibration
Self Diagnosis
Automatic Start / Stop
Automatic Distance Meseasure Device
Changeable Between GM and Ounce
Changeable Cycle 8 sec
Net Weight Without Cover Approx 125 Kg.

WHEEL BALANCER (DIGITAL)

Model : AO-DIGIBAL



Model :AO-DIGIBAL

Technical Data

Zbalancing Modes : Dynamic, STA, ALL ALUI-4
Self Calibration and Diagnostics
Maximum Wheel weight : 70 kg.
Rim Diameter: 10" to 24"
Rim Width : 1.5" to 12"
Accuracy : 1gm.Cycle Time : 7 sec.
Optional Wheel Cover

*In view of our policy of continuous Research & Development on our product.Trinity Sales & Service reserve the right to alter specification or design without prior notice and liability.



TRINITY SALES & SERVICES



Admin & Works : Unit No 2, Nikisha Industrial Estate, Pandurang wadi, Behind Samrat Hotel, National Highway no 8, Near Dahisar Check Naka, Dist Thane - 400107, Maharashtra, India

Regd. Office : E/603, Yudhistir Bldg., N.L. Complex, Anand Nagar, Dahisar (East), Mumbai - 400 068.

Telephone : 022 28453297 | 022 28453472, **Mobile :** 9833268605 | 9322278159 | 9833613011

Web-Site : www.autoonettrinity.com | www.trinitysales.tradeindia.com | www.indiamart.com/trinitysales

E-mail : sales@autoonettrinity.com / tss_trinity@yahoo.com

ELECTROPNEUMATIC TYRE CHANGER

Model TC 605 & 606

Features

- *Rigid Vertical and Horizontal Post
- *Swing arm with manual locking device for space saving operation.
- *Strengthened vertical post is not subject to flexion during heavy work operation.
- *Smartool Tool Head
- *Radian design guarantees that demounting and mounting are always carried out in an optimum way and in the utmost safety.
- *Alloy material with special surface treatment ensures the strength and life of use.

Powerful Bead Breaking System

- *Stainless steel cylinder against any rust
- *Double -acting pneumatic cylinder generates powerful 2,700kg bead breaking force loosen hard wheel with ease.
- *Adjustable bead breaking shoe with precise radian allows tyre beads to be accurately loosened.

Pedal Assembly

- *Pedals in press-cast aluminum
- *Removable front cover of pedal assembly for the convenience of maintenance and service.

Wheel Clamping System

- *Rigid self-centering chuck with precise inching sliding locating the desired clamping size in one time.
- *Reversible direction of turntable gives operators the ability to back up in the event of turntable stall during stubborn bead installation to reduce the risk of tire damage .
- *Two-speed turntable available

Maintenance-free Gear Box

- *Special grease lubrication gives efficient heat dissipation for longer lift of use.
- *High-strength alloy worm and worm gear with accurate matching and conformity transfer the stable and powerful working force onto the turntable.

Tubeless Tyre Inflation System (Optional with TC605)

- *Integrated air tank inside the vertical post for space saving.
- *The blast inflation system is activated by a single pedal command with two positions.
- *Position 1 : standard inflating mode.
- *Position 2: bead seating, by means of a large quantity of pressurized air passing through nozzles built into the chuck slides.
- *Pressure release button on inflation gauge to discharge exceed pressure.

Wheel Protection Package

- *Complete with kit of plastic protections to prevent damage to the most delicate rims.



TECHNICAL PARAMETERS

Rim Clamping Outside	10"~20"
Rim Clamping Inside	12"~24"
Max.Wheel Diameter	1,150mm
Max.Wheel Width	14"
Bead Breaking Force	2,700kg
Air Pressure	8-10bar
N.W.	255kg

ELECTROPNEUMATIC TYRE CHANGER

Model ATC 100

Tyre Changer :
(MODEL :ATC-100)

Autoone Brand Automatic Tyre Changer Model atc 100 is an Electro Pneumatic Machine with toughest and robust body. This tyre changer ensures easy fitting & removal of tyre within very short time without any trouble.

BEAD BREAKER:

The Powerful bead breaker is operated by a double acting cylinder (186 mm) with drawn high tensile alloy steel barrel designed to last a long time even under unfavorable conditions such as humidity / poor lubrications etc. as soon as wheel has been placed between the rubber support bracket and the bead breaking plate, the pneumatic arm can be actuated by means of paddle. The arm exerts a break force of 16.5 KN at 12 bar by which even difficult to shift type bead can be relived from the rim without risk of damage of rim

FOUR JAW CLAMPING:

The self centering chuck is equipped with four locking jaws rotating in either direction and can clamp either from the outside of the rim (10" - 20") or from inside of rim (12" - 22"). The clamping jaws are operated by two pneumatic cylinder. All four jaws are running simultaneously in either direction and hence self centering is maintained. The tyre can be fitted and removed without touching the rim. Hence wheel plated rim will be totally safe

SAFETY PRECAUTIONS:

To prevent the machine from the risk of break down when continuously at work, an air supply service unit oil atomizer is fitted with the system. Due to this, pneumatic Cylinder are automatically lubricated with oil, hence there is no chance for humidity and foreign particles to accumulate in the Cylinders.



TECHNICAL DATA :

Self Centering Chuck	
External Rim Clamping	10" min. 20" max
Internal Rim Clamping	10" min. 22" max
Wheel Rim Width	10"
Max. Chuck rotating to torque	100-110 Kg.
Drive Motor	0.75 Kw / 1 HP 3 Ph 412 V or 0.75 Kw / 1 HP 1 Ph 230 V
Bead Breaker Opening	13" (325mm)
Max. Wheel dia.	40" (1010mm)
Bead Breaking Pressure	16.5 Kn at 12 Bar
Compressed Air required	6 to 12 Bars.
Floor space (L X W X H)	960 X 730 X 1560 (in mm)
Net Weight of machine	200 Kgs.Approx.
Gross Weight of machine	230 Kgs.Approx.

*In view of our policy of continuous Research & Development on our product. Trinity Sales & Service reserve the right to alter specification or design without prior notice and liability.



TRINITY SALES & SERVICES

Admin & Works : Unit No 2, Nikisha Industrial Estate, Pandurang wadi, Behind Samrat Hotel, National Highway no 8, Near Dahisar Check Naka, Dist Thane - 400107, Maharashtra, India

Regd. Office : E/603, Yudhistir Bldg., N.L. Complex, Anand Nagar, Dahisar (East), Mumbai - 400 068.

Telephone : 022 28453297 | 022 28453472, **Mobile :** 9833268605 | 9322278159 | 9833613011

Web-Site : www.autoonettrinity.com | www.trinitysales.tradeindia.com | www.indiamart.com/trinitysales

E-mail : sales@autoonettrinity.com / tss.trinity@yahoo.com



TRUCK TYRE CHANGER

Model TC 605 & 606

Features

- *Rigid Vertical and Horizontal Post
- *Swing arm with manual locking device for space saving operation.
- *Strengthened vertical post is not subject to flexion during heavy work operation.
- *Smartool Tool Head
- *Radian design guarantees that demounting and mounting are always carried out in an optimum way and in the utmost safety.
- *Alloy material with special surface treatment ensures the strength and life of use.

Powerful Bead Breaking System

- *Stainless steel cylinder against any rust
- *Double -acting pneumatic cylinder generates powerful 2,700kg bead breaking force loosen hard wheel with ease.
- *Adjustable bead breaking shoe with precise radian allows tyre beads to be accurately loosened.

Pedal Assembly

- *Pedals in press-cast aluminum
- *Removable front cover of pedal assembly for the convenience of maintenance and service.

Wheel Clamping System

- *Rigid self-centering chuck with precise inching sliding locating the desired clamping size in one time.
- *Reversible direction of turntable gives operators the ability to back up in the event of turntable stall during stubborn bead installation to reduce the risk of tire damage .
- *Two-speed turntable available

Maintenance-free Gear Box

- *Special grease lubrication gives efficient heat dissipation for longer lift of use.
- *High-strength alloy worm and worm gear with accurate matching and conformity transfer the stable and powerful working force onto the turntable.

Tubeless Tyre Inflation System (Optional with TC605)

- *Integrated air tank inside the vertical post for space saving.
- *The blast inflation system is activated by a single pedal command with two positions.
- *Position 1: standard inflating mode.
- *Position 2: bead seating, by means of a large quantity of pressurized air passing through nozzles built into the chuck slides.
- *Pressure release button on inflation gauge to discharge exceed pressure.

Wheel Protection Package

- *Complete with kit of plastic protections to prevent damage to the most delicate rims.

TECHNICAL PARAMETERS

Rim Clamping Outside	10"~20"
Rim Clamping Inside	12"~24"
Max.Wheel Diameter	1,150mm
Max.Wheel Width	14"
Bead Breaking Force	2,700kg
Air Pressure	8-10bar
N.W.	255kg

TRUCK WHEEL BALANCER

Model TC 605 & 606

Features

- *Rigid Vertical and Horizontal Post
- *Swing arm with manual locking device for space saving operation.
- *Strengthened vertical post is not subject to flexion during heavy work operation.
- *Smartool Tool Head
- *Radian design guarantees that demounting and mounting are always carried out in an optimum way and in the utmost safety.
- *Alloy material with special surface treatment ensures the strength and life of use.

Powerful Bead Breaking System

- *Stainless steel cylinder against any rust
- *Double -acting pneumatic cylinder generates powerful 2,700kg bead breaking force loosen hard wheel with ease.
- *Adjustable bead breaking shoe with precise radian allows tyre beads to be accurately loosened.

Pedal Assembly

- *Pedals in press-cast aluminum
- *Removable front cover of pedal assembly for the convenience of maintenance and service.

Wheel Clamping System

- *Rigid self-centering chuck with precise inching sliding locating the desired clamping size in one time.
- *Reversible direction of turntable gives operators the ability to back up in the event of turntable stall during stubborn bead installation to reduce the risk of tire damage .
- *Two-speed turntable available

Maintenance-free Gear Box

- *Special grease lubrication gives efficient heat dissipation for longer lift of use.
- *High-strength alloy worm and worm gear with accurate matching and conformity transfer the stable and powerful working force onto the turntable.

Tubeless Tyre Inflation System (Optional with TC605)

- *Integrated air tank inside the vertical post for space saving.
- *The blast inflation system is activated by a single pedal command with two positions.
- *Position 1: standard inflating mode.
- *Position 2: bead seating, by means of a large quantity of pressurized air passing through nozzles built into the chuck slides.
- *Pressure release button on inflation gauge to discharge exceed pressure.

Wheel Protection Package

- *Complete with kit of plastic protections to prevent damage to the most delicate rims.

TECHNICAL PARAMETERS

Rim Clamping Outside	10"~20"
Rim Clamping Inside	12"~24"
Max.Wheel Diameter	1,150mm
Max.Wheel Width	14"
Bead Breaking Force	2,700kg
Air Pressure	8-10bar
N.W.	255kg

A unique true value instant online **Nitrogen Generator** for Tyres



Model :- N₂ Buster ATI

Model :- N₂Buster

TECHNICAL SPECIFICATIONS*

- Weight : 70kg
- Height : 1220.0mm
- Width : 305.0mm
- Depth : 381.0mm
- N₂ Generation : Automatic
- Pressure Control : Automatic
- Pressure Gauge : 0 - 150 psi
- Air Input : 60 psi to 150 psi
- N₂ Output pressure : 20% less than input
- Switches : Rocker
- Controls : Specific to operation
- Power Source : 220V AC

FEATURES

- 97% to 99.5% Pure Nitrogen Output (5 years Purity Guarantee)
- Instant Nitrogen Output - No Waiting
- Automatic Inflator / Analog Filling Gun provided with the machine
- Air IN Pressure Gauge
- N₂ OUT Pressure Gauge
- Working Range - 20 psi to 150 psi
- Suitable for all types of two Wheeler, Passenger Cars, LCV & HCV
- Industrial grade quality hoses and fittings
- Smallest in size & Fastest in Nitrogen filling
- Future upgrading also available
- 4 Filling Hoses (optional)
- Can fill N₂ and air from same machine.

BENEFITS TO VEHICLE

- Cooler tyre running
- Fuel saving up-to 10%
- Smooth Handling
- Extended tyre life
- Less pressure loss
- Enhanced performance
- Smoother vibration free ride
- No tyre bursting
- Precise Vehicle on road breaking



Manual Machine with
Pressure Gauge
also available

*In view of our policy of continuous Research & Development on our product. Trinity Sales & Service reserve the right to alter specification or design without prior notice and liability.



TRINITY SALES & SERVICES

Admin & Works : Unit No 2, Nikisha Industrial Estate, Pandurang wadi, Behind Samrat Hotel, National Highway no 8, Near Dahisar Check Naka, Dist Thane - 400107, Maharashtra, India

Regd. Office : E/603, Yudhistir Bldg., N.L. Complex, Anand Nagar, Dahisar (East), Mumbai - 400 068.

Telephone : 022 28453297 | 022 28453472, **Mobile :** 9833268605 | 9322278159 | 9833613011

Web-Site : www.autoonetrinity.com | www.trinitysales.tradeindia.com | www.indiamart.com/trinitysales

E-mail : sales@autoonetrinity.com / tss.trinity@yahoo.com



**A truly accurate and reliable
scan tool you can trust**

G-SCAN



Touch Screen and Keypad

User-friendly design operating on both intuitive touch-screen and familiar key strokes.

Dual CPU

Equipped with 2 CPUs working together to maximize the processing speed

CAN Enabled Onboard

Latest CAN-bus communication protocols enabled on-board. No external module required.

Features

• Dual CPU for greater performance

Your time should not be wasted for start-up and software loading. G-scan is designed to provide fast boot up, quick response and high speed performance by adopting a dual CPU system, which guarantees your readiness for prompt and timely service to your customers.

• Touch Screen and Hard Key Combo

Touch screen interface offers greater user experience of easy and intuitive operation of the diagnostic functions. At the same time, considering the greasy and dusty workshop environment, G-scan is fitted with 12 hard keys that do the functions without having to touch the screen.

• Longevity

The hardware design incorporates the latest technologies needed for all known communication protocols including CAN-Bus. No external module or separate CAN adapter is required.

• Color TFT LCD

High definition 5.6" 16:9 scale TFT LCD screen provides great readability, crisp data reading and accurate touch screen operations.

• Data log and quick feedback support

Log the actual bi-directional data transmission between the G-scan and the vehicle control modules and transmit it to GIT by email or through internet. The logged data will be analyzed by the GIT engineers who will try to give feedback by providing the debugged software in next 24 hours.

• Rechargeable Battery

A rechargeable Lithium Polymer Battery is included as the basic supply in any optional kit. Besides the possibility to use the G-scan without an external power supply for hours, it also enables the advanced diagnostic functions that need to crank the engine.

• Up to 4 GB SD Card Memory


The most widely used storage solution is adopted. The storage capability of up to 4 GB sufficiently accommodates entire software applications virtually needed for all brands around the globe economically and efficiently.

• 24V Commercial Vehicle

Designed to support the 24V commercial vehicles systems, make direct connection to the buses and trucks. (Not available for US and Canada)


Convenience

• Screen capture and quick note

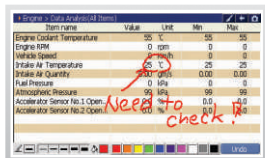

Simply capture the screen any time and add your quick hand written notes on the screen. It can be saved and reloaded for your future reference.

• Quick Test : Automatic System Search




"System Search" function checks all the possible systems in the car automatically and report the number of fault codes found and availability of special functions of each detected system.

• Self-test function



In case of continued diagnostic function failure or abnormal operation, self-test function identifies the G-scan base unit has internal hardware problem or not.

• Simple Menu Selection

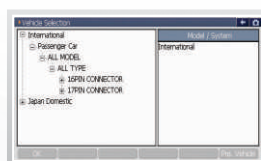

No more hassles for finding the model codes or engine codes. Simply select the diagnostic adapter type from the menu, then select the system to test and go.

Specifications

CPU	ARM 9 (400MHz) & ARM 9 (266 MHz) Dual CPU
External Memory	2GB - SD Card (Maximum 4GB)
Operating Temperature	0 ~ 45°C (When charging) / 0 ~ 50°C (When using)
Display	5.6" TFT LCD (480 × 234)
CAN-BUS	High / Low / Single CAN fully supported on-board
Rechargeable Battery	Li-Ion Polymer 2100mAh 1 Cell
Operating Voltage	7 ~ 35DCV
Case Material	PC + ABS & TPE Shroud
Dimension	194(W) × 129(H) × 59(D)mm
Weight	Approx. 900g
Expandability	USB 1.1
Input Device	Touch Screen+Power ON/OFF, ENTER, ESC, 4 direction, F1-F6 Function keys



※ Supported vehicle list is updated frequently and the specification is subject to change without notice, Refer to our website for the latest information.

*In view of our policy of continuous Research & Development on our product, Trinity Sales & Service reserve the right to alter specification or design without prior notice and liability. Software updates are carried by the manufacturer as per their planing and as per available resources.



TRINITY SALES & SERVICES



Admin & Works : Unit No 2, Nikisha Industrial Estate, Pandurang wadi, Behind samrat hotel, National Highway no 8, Near Dahisar Check Naka, Dist Thane - 400107, Maharashtra, India

Regd. Office : E/603, Yudhistir Bldg., N.L. Complex, Anand Nagar, Dahisar (East), Mumbai - 400 068.

Telephone : 022 28453297 | 022 28453472, **Mobile** : 9833268605 | 9322278159 | 9833613011

Web-Site : www.autoonetrinity.com | www.trinitysales.tradeindia.com | www.indiamart.com/trinitysales

E-mail : sales@autoonetrinity.com / tss.trinity@yahoo.com

LAUNCH CAR SCANNERS



Auto-One CCD wheel aligner is stable, accurate, low cost, and easy-to-maintain 8 CCD wheel aligner, specially designed for clients who need to expand their business. With featured zigbee wireless data transfer technology, Auto-One CCD is more Stable and advanced than bluetooth or 433MHz RF equipped wheel aligners.

Professional

- ▶ High accuracy
- ▶ 6 meter wheel base
- ▶ 8 toe sensors
- ▶ Fast & stable data transfer
- ▶ 24 inch clamps
- ▶ Super large databank

Affordable

- ▶ Best price/performance ratio

Flexible

- ▶ PC-free mode
- ▶ Automatic detect low chassis
- ▶ Interchangeable sensor heads
- ▶ Two wheel mode(Front)

Specification


Item	Precision	Range
Front Total Toe-in	$\pm 4'$ ($\pm 0.02^\circ$)	$\pm 20^\circ$
Camber	$\pm 2'$ ($\pm 0.01^\circ$)	$\pm 20^\circ$
Caster	$\pm 6'$ ($\pm 0.1^\circ$)	$\pm 20^\circ$
SAI/KPI	$\pm 6'$ ($\pm 0.1^\circ$)	$\pm 20^\circ$
Setback	$\pm 2'$ ($\pm 0.03^\circ$)	$\pm 5^\circ$
Thrust Angle	$\pm 2'$ ($\pm 0.03^\circ$)	$\pm 6^\circ$

Note: The above accuracy can be confirmed only when the user follows the specified operation procedures as instructed in the user manual.

Requirements on Surroundings

Ambient Temperature - $20^\circ\text{C} \sim +50^\circ\text{C}$
Relative Humidity $\leq 90\%$


Accessories



Turntable



Steering Wheel Holder



Break pedal depressor



24-inch wheel clamps

VEHICLE REFRIGERANT MANAGEMENT SYSTEM

(Fully Automatic)

NOW with
LEAK TEST



RECOVERS | RECYCLES | RECHARGES



Powerful & Robust Design

REFRIGERANT MANAGEMENT SYSTEM

(Model No.AO-I34A Auto)

TECHNICAL SPECIFICATIONS*

- Weight : 95kg (Including Gas Tank)
- Height : 1016.0mm
- Width : 485.0mm
- Depth : 609.6.0mm
- Switches : Heavy Duty
- Control Panel : Digital display with keypad
- Weight Range : 50 grams to 30 kg
- Pressure Gauges : Specific to Refrigerant
- Valves : Quarter Turn Italian Type
- Compressor : Hermetic (1/5)
- Vacuum Pump : Double Stage, Compressor for pressure
- Cooling Fan : 220V AC, High Speed
- Charging Hoses : 6ft. Standard, Specific to Operation
- Refrigerant Tank : 10kg Standard
- Power Source : 220V AC
- Wheels : Rubberized Coaster Type

FEATURES

- Fast Recovery of Refrigerant
- In-built Pressure Leak Test System (Optional)
- Separates Oil, Moisture, Acid & other contamination from Recovered Refrigerant
- Double Stage Recycling of Recovered Refrigerant
- Double stage vacuum pump ensure maximum and efficient vacuuming of the system
- Digital weight display of Recovered/Charged Refrigerant
- Auto-cut on vacuuming & recovery
- Auto-cut on required charged refrigerant
- Refrigerant charging by pressure difference
- Air Purge on a Click of the button
- Built-in Oil Charging
- Built-in system's oil catch bottle with measurement marking
- Refillable refrigerant tank
- Scale measurement ± 2.5 grams for accurate measurement
- Double sided powered coated, heavy duty sheet metal chassis
- No bay space required
- Comes with all required accessories

BENEFITS

- More AC Cooling
- Gas Saving
- Efficient Vacuuming
- High earning by recovery of Refrigerant
- Assured Liquid and Dry Refrigerant
- Efficient Working with no efforts
- Less Return Complaints



*In view of our policy of continuous Research & Development on our product. Trinity Sales & Service reserve the right to alter specification or design without prior notice and liability.



TRINITY SALES & SERVICES

Admin & Works : Unit No 2, Nikisha Industrial Estate, Pandurang wadi, Behind Samrat Hotel, National Highway no 8, Near Dahisar Check Naka, Dist Thane - 400107, Maharashtra, India

Regd. Office : E/603, Yudhistir Bldg., N.L. Complex, Anand Nagar, Dahisar (East), Mumbai - 400 068.

Telephone : 022 28453297 | 022 28453472, **Mobile :** 9833268605 | 9322278159 | 9833613011

Web-Site : www.autoonetrinity.com | www.trinitysales.tradeindia.com | www.indiamart.com/trinitysales

E-mail : sales@autoonetrinity.com / tss.trinity@yahoo.com



INJECTOR CLEANER & TESTOR (Petrol, Cng, Lpg)

Model :- AO4IC

FEATURES

Real RPM Digital Display upto 3100rpm

- Tests Available - Leak Test, Flow Test, Pulse Flow Open Flow & Equilisation test
- Only machine with Back Light System for better visualization
- Highly Precise "per hole" Spray Pattern Visibility
- CNC made Universal Aluminum Injector Rail for Rust free finish
- It cleans all European and Japanese MPFI (Top Fed) Systems
- Unique borosil glass made funnels with Stop Cock
- Spray quantity measurement from 0 - 25ml
- Fluid Pressure Control Regulator
- Max. Pressure 0 to 60 pounds for faster & efficient cleaning
- Easily changeable filter fitted outside the machine



ULTRA SONIC BATH (Optional)

INJECTOR CLEANER & TESTOR WITH CARBON CLEAN

Model :- AO4CC

FEATURES Injector Cleaning and Testing Process

- Tests available - Leak Test, Flow Test, Pulse Flow, Open Flow & Equilisation.
- Highly precise "per hole" spray pattern visibility.
- CNC made universal Injector Rail.
- It cleans all European and Japanese MPFI (Top Fed) systems.
- Unique borosil glass made funnels with stop cock.
- Spray quantity measurement from 1ml to 25ml.
- Fluid Pressure Control Regulator.
- Max. pressure 0 to 60 pounds for faster & efficient cleaning.
- Easy changeable filter, fitted outside the machine, for faster service.

FEATURES - Decarbonizing Process

- Can Decarbonize any Petrol Engine & Diesel Engine
- Carburetor and MPFI compatible
- Heavy Duty Spring Type Timer
- Semi Automatic Pressure Control
- No extra electric connection required
- Internal circuit protector
- Auto process complete warning and auto off
- Industrial grade quality hoses and fittings



AUTOMOTIVE LEAK LOCATOR

Feature

► Simple To Operate

The Smoke Automotive Leak Locator is easily controlled with a timer setting and flow control. Set the timer then the machine will generate smoke, and control the flow with the flow controller. The output is regulated to 12~14 Inches of Water Column, this pressure is perfect to perform leak test of EVAP system and other automotive systems with no damage to the vehicle sealing.

► Save time and fast leak detect

In most cases, a scan tool may find out pressure sensors abnormal etc., while actually the 'pressure low' problem is caused by leak somewhere.

► Multi-function

The Smoke Automotive Leak Locator is a multi purpose tool essential for EVAP system, but also applicable for: EGR valves, Gaskets & Fittings, Hoses, Worn Throttle shafts, Break Boosters, Catalytic Converters, Oil Leaks, Lamp Housings, manifolds and more....

► LED time indicator, Adjustable air flow and 1 ~ 20 minutes adjustable operating time

Adjustable timer and air flow to perform leak test on different system that requires different flow amount.

► Inbuilt air pump

Performing leak test with no air compressor, which may not be available for every workshop.

► Various fittings

For different application needs

► 3 Color LED torch

To help find leak in different brightness circumstance

SMOKE

100
Automotive Leak Locator

Function

- Vacuum Leak Test
- Exhaust Leak Test
- Under Dash Leaks
- EVAP Leak Test
- Manifold Leak Test
- And more ...

Specification

- Air pressure: 0.03~0.035bar
- Air flow: 0.1~0.5 L/MIN
- Power: DC12V
- Packing: Carton box
- Weight: 5kg
- Dimension: L375 x W185 x H340 mm

VACUUM BRAKE & CLUTCH BLEEDER

A Unique vacuum bleeder set.

1. Bleeds any AIR bubbles from Brake & with ease for safety.
2. Single man operation - Saves on labor.
3. HD plastic body for life long operation.
4. Automatic oil filling.
5. No training needed.
6. Ready to use accessories, packing.
7. Italian spare used.
8. Saves oil, Time & Money.
9. Perfect bleeding in minutes.
10. Unique PU adaptor for all models



Model :- AO-I0807

*In view of our policy of continuous Research & Development on our product. Trinity Sales & Service reserve the right to alter specification or design without prior notice and liability.



TRINITY SALES & SERVICES



Admin & Works : Unit No 2, Nikisha Industrial Estate, Pandurang wadi, Behind Samrat Hotel, National Highway no 8, Near Dahisar Check Naka, Dist Thane - 400107, Maharashtra, India

Regd. Office : E/603, Yudhistir Bldg., N.L. Complex, Anand Nagar, Dahisar (East), Mumbai - 400 068.

Telephone : 022 28453297 | 022 28453472, **Mobile :** 9833268605 | 9322278159 | 9833613011

Web-Site : www.autoonettrinity.com | www.trinitysales.tradeindia.com | www.indiamart.com/trinitysales

E-mail : sales@autoonettrinity.com / tss.trinity@yahoo.com

TWO POST VEHICLE LIFT

(4 ton Electro Hydraulic)

Model : AO-HL4TBF



Engagement Release Mode: Dual point manual release

Arm Assembly: Asymmetric two-stage telescoping long arms and short arms

Safety Mechanism

Automatic arm lock restraints

Mechanical safety latch in each post

Parachute valve under each cylinder in case of hydraulic hose fracture

Relief valve to prevent overloading

Synchronization cable

Control System:

Lifting operation by pressing the button on motor

Manual lowering operation by pressing the lever on power unit

TECHNICAL PARAMETERS

Model	AO-HL4TBF
Lifting Capacity	4,000kg
Min. Height	120mm
Max. Lifting Height	1,900mm
Overall Height	2,822mm
Overall Width	3,384mm
Width between Columns	2,760mm
Short Arm Length	680mm-1,020mm
Long Arm Length	860mm-1,300mm
Lifting Time	50s
Lowering Time	30s
Power	220v/380v, 50Hz/60Hz 1Ph/3Ph



TWO POST VEHICLE LIFT

(4 ton Clear Floor Electro Hydraulic)

Model : AO-HL4TCF



Engagement Release Mode: Single point manual release

Arm Assembly: Asymmetric two-stage telescoping long arms and two-stage telescoping short arms.

Safety Mechanism:

- *Automatic arm lock restraints
- *Mechanical safety latch in each post
- *Parachute valve under each cylinder in case of hydraulic hose fracture
- *Relief valve to prevent overloading
- *Synchronization cable

Control System:

- *Lifting operation by pressing the button on motor
- *Manual lowering operation by pressing the lever on power unit

TECHNICAL PARAMETERS

Model	AO-HL4TCF
Lifting Capacity	4,000kg
Min. Height	120mm
Max. Lifting Height	1,900mm
Overall Height	3,636mm
Overall Width	3,381mm
Width between Columns	2,760mm
Short Arm Length	680mm-1,020mm
Long Arm Length	860mm-1,300mm
Lifting Time	50s
Lowering Time	30s
Power	220v/380v, 50Hz/60Hz 1 Ph/3 Ph

*In view of our policy of continuous Research & Development on our product. Trinity Sales & Service reserve the right to alter specification or design without prior notice and liability.



TRINITY SALES & SERVICES

Admin & Works : Unit No 2, Nikisha Industrial Estate, Pandurang wadi, Behind Samrat Hotel, National Highway no 8, Near Dahisar Check Naka, Dist Thane - 400107, Maharashtra, India

Regd. Office : E/603, Yudhistir Bldg., N.L. Complex, Anand Nagar, Dahisar (East), Mumbai - 400 068.

Telephone : 022 28453297 | 022 28453472, **Mobile :** 9833268605 | 9322278159 | 9833613011

Web-Site : www.autoonetrinity.com | www.trinitysales.tradeindia.com | www.indiamart.com/trinitysales

E-mail : sales@autoonetrinity.com / tss.trinity@yahoo.com



ELECTROPNEUMATIC TYRE CHANGER

Model TC 605 & 606

Features

- *Rigid Vertical and Horizontal Post
- *Swing arm with manual locking device for space saving operation.
- *Strengthened vertical post is not subject to flexion during heavy work operation.
- *Smartool Tool Head
- *Radian design guarantees that demounting and mounting are always carried out in an optimum way and in the utmost safety.
- *Alloy material with special surface treatment ensures the strength and life of use.

Powerful Bead Breaking System

- *Stainless steel cylinder against any rust
- *Double -acting pneumatic cylinder generates powerful 2,700kg bead breaking force loosen hard wheel with ease.
- *Adjustable bead breaking shoe with precise radian allows tyre beads to be accurately loosened.

Pedal Assembly

- *Pedals in press-cast aluminum
- *Removable front cover of pedal assembly for the convenience of maintenance and service.

Wheel Clamping System

- *Rigid self-centering chuck with precise inching sliding locating the desired clamping size in one time.
- *Reversible direction of turntable gives operators the ability to back up in the event of turntable stall during stubborn bead installation to reduce the risk of tire damage .
- *Two-speed turntable available

Maintenance-free Gear Box

- *Special grease lubrication gives efficient heat dissipation for longer lift of use.
- *High-strength alloy worm and worm gear with accurate matching and conformity transfer the stable and powerful working force onto the turntable.

Tubeless Tyre Inflation System (Optional with TC605)

- *Integrated air tank inside the vertical post for space saving.
- *The blast inflation system is activated by a single pedal command with two positions.
- *Position 1 : standard inflating mode.
- *Position 2: bead seating, by means of a large quantity of pressurized air passing through nozzles built into the chuck slides.
- *Pressure release button on inflation gauge to discharge exceed pressure.

Wheel Protection Package

- *Complete with kit of plastic protections to prevent damage to the most delicate rims.



TECHNICAL PARAMETERS

Rim Clamping Outside	10"~20"
Rim Clamping Inside	12"~24"
Max.Wheel Diameter	1,150mm
Max.Wheel Width	14"
Bead Breaking Force	2,700kg
Air Pressure	8-10bar
N.W.	255kg

ELECTROPNEUMATIC TYRE CHANGER

Model ATC 100

Tyre Changer :
(MODEL :ATC-100)

Autoone Brand Automatic Tyre Changer Model atc 100 is an Electro Pneumatic Machine with toughest and robust body. This tyre changer ensures easy fitting & removal of tyre within very short time without any trouble.

BEAD BREAKER:

The Powerful bead breaker is operated by a double acting cylinder (186 mm) with drawn high tensile alloy steel barrel designed to last a long time even under unfavorable conditions such as humidity / poor lubrications etc. as soon as wheel has been placed between the rubber support bracket and the bead breaking plate, the pneumatic arm can be actuated by means of paddle. The arm exerts a break force of 16.5 KN at 12 bar by which even difficult to shift type bead can be relived from the rim without risk of damage of rim

FOUR JAW CLAMPING:

The self centering chuck is equipped with four locking jaws rotating in either direction and can clamp either from the outside of the rim (10" - 20") or from inside of rim (12" - 22"). The clamping jaws are operated by two pneumatic cylinder. All four jaws are running simultaneously in either direction and hence self centering is maintained. The tyre can be fitted and removed without touching the rim. Hence wheel plated rim will be totally safe

SAFETY PRECAUTIONS:

To prevent the machine from the risk of break down when continuously at work, an air supply service unit oil atomizer is fitted with the system. Due to this, pneumatic Cylinder are automatically lubricated with oil, hence there is no chance for humidity and foreign particles to accumulate in the Cylinders.



TECHNICAL DATA :

Self Centering Chuck	
External Rim Clamping	10" min. 20" max
Internal Rim Clamping	10" min. 22" max
Wheel Rim Width	10"
Max. Chuck rotating to torque	100-110 Kg.
Drive Motor	0.75 Kw / 1 HP 3 Ph 412 V or 0.75 Kw / 1 HP 1 Ph 230 V
Bead Breaker Opening	13" (325mm)
Max. Wheel dia.	40" (1010mm)
Bead Breaking Pressure	16.5 Kn at 12 Bar
Compressed Air required	6 to 12 Bars.
Floor space (L X W X H)	960 X 730 X 1560 (in mm)
Net Weight of machine	200 Kgs.Approx.
Gross Weight of machine	230 Kgs.Approx.

*In view of our policy of continuous Research & Development on our product. Trinity Sales & Service reserve the right to alter specification or design without prior notice and liability.



TRINITY SALES & SERVICES

Admin & Works : Unit No 2, Nikisha Industrial Estate, Pandurang wadi, Behind Samrat Hotel, National Highway no 8, Near Dahisar Check Naka, Dist Thane - 400107, Maharashtra, India

Regd. Office : E/603, Yudhistir Bldg., N.L. Complex, Anand Nagar, Dahisar (East), Mumbai - 400 068.

Telephone : 022 28453297 | 022 28453472, **Mobile :** 9833268605 | 9322278159 | 9833613011

Web-Site : www.autoonettrinity.com | www.trinitysales.tradeindia.com | www.indiamart.com/trinitysales

E-mail : sales@autoonettrinity.com / tss.trinity@yahoo.com





Launch X431 Diagon

Feature

- *Compact main unit -Standard equipment for technicians
- *The only diagnostic tool which can work on two vehicles at the same time
- *Bluetooth technology, wireless communication. 100 m bluetooth communication, Cable communication support
- *Universal 16PIN connector
- *Fully inherited diagnostic functions from X-431. Capable of nearly all domestic vehicle makes and Asian, European, American vehicle makes.
- *Greatly improved program running speed
- *More convenient software update
- *4.3 inch high luminance, high resolution color touch screen
- *1530mAh Rechargeable battery
- *1G memory card
- *Standard USB printer connector, external printer support

Specification

- *Operating System: WIN CE 5.0
- *CPU: 400 MHZ ARM9
- *Memory Card: 1G TF Card
- *Main Unit: Universal Serial Bus/USB
- *Main Unit Power: DC5V
- *X-431 Diagon Connector: DC12V/24V
- *Printer Interface: USB
- *Display Screen: 480X272, 4.3-inch LCD with touch screen
- *Rechargeable Battery: 1530 mAh
- *Bluetooth: theoretically 100m, suggest 15-20m
- *Upgrading Interface: USB

*In view of our policy of continuous Research & Development on our product. Trinity Sales & Service reserve the right to alter specification or design without prior notice and liability. Software updates are carried by the manufacturer as per their planing and as per available resources.



TRINITY SALES & SERVICES



Admin & Works : Unit No 2, Nikisha Industrial Estate, Pandurang wadi, Behind samrat hotel, National Highway no 8, Near Dahisar Check Naka, Dist Thane - 400107, Maharashtra, India

Regd. Office : E/603, Yudhistir Bldg., N.L. Complex, Anand Nagar, Dahisar (East), Mumbai - 400 068.

Telephone : 022 28453297 | 022 28453472, **Mobile :** 9833268605 | 9322278159 | 9833613011


Web-Site : www.autoonetrinity.com | www.trinitysales.tradeindia.com | www.indiamart.com/trinitysales

E-mail : sales@autoonetrinity.com / tss_trinity@yahoo.com

Four Post Vehicle Lift

(4.5 ton / 6.3 ton Electro Hydraulic)

Model : AO-H4PL4T / H4PL6T

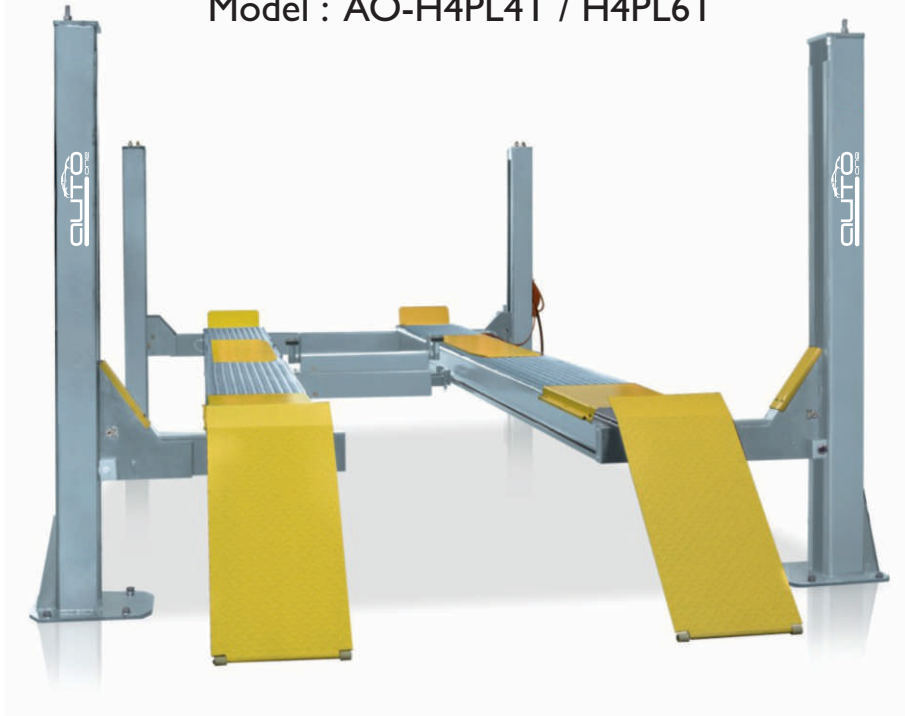

Feature:

- *Engagement Release Mode:
- *Single point manual release (Standard)
- *Pneumatic release (Optional)
- *Electrical release (Optional)

Platforms:

- *Front-open design, convenient for operation.
- *Adjustable platform to accommodate difference vehicle tracks and optimized access to vehicle underside
- *Complete with front housing for turntables and rear slip plates for total wheel alignment

Safety Mechanism:

- *Mechanical safety latch every 80mm in each post
- *Drop speed control in case of hydraulic hose fracture
- *Relief valve to prevent overloading
- *Immediate-triggering safety stud devices in the event a cable slackens or fails.
- *Front and rear positioning wheel stop

Control System:

- *24V low-voltage dead-man controls
- *Automatic operation with main power switch, lifting button, lowering button and locking button
- *Technical Parameters

TECHNICAL PARAMETERS

Model	L-445FE	LAO-H4PL4T /H4PL6T
Capacity	4,500kg	6,300kg
Min. Height	221mm	221mm
Max. Lifting Height	1,850mm	1,850mm
Overall Length	6,103mm	7,403mm
Runway Length	4,851mm	6,151mm
Overall Width	3,530mm	3,530mm
Overall Height	2,395mm	2,395mm
Width between Columns	1,090mm	1,090mm
Runway Width	510mm	510mm
Width between Runways	1,090mm	1,090mm
Lifting Time	50s	50s
Lowering Time	35s	35s
Power	220v/380v, 50Hz/60Hz 1Ph/3Ph	220v/380v, 50Hz/60Hz

Low rise washing Lift

(4 ton Electro Hydraulic Portable lift)

Model : AO-LR300



Feature:

- *Mid-rise scissor lift for cars, vans and light-duty trucks
- *Ideal for tyre, wheel and brake related repairs, collision repair work and new car preparation
- *5 position mechanical safety lock system
- *Dual cylinders and scissor lift design for maximum strength and stability
- *Portable trolley supports pump and moves lift
- *Easily adjustable sliding radius arms
- *Engagement Release Mode:
- *Automatic mechanical release by novel trip-over mechanism at the highest position

TECHNICAL PARAMETERS

Model	AO-LR300
Lifting Capacity	3,000kg
Min. Height	118mm
Max. Lifting Height	1,152mm
Max. Lifting Height with Adaptors	1,260mm
Overall Length	2,230mm
Overall Width	1,018mm
Lifting Time	35s
Lowering Time	25s

*In view of our policy of continuous Research & Development on our product. Trinity Sales & Service reserve the right to alter specification or design without prior notice and liability.



TRINITY SALES & SERVICES

Admin & Works : Unit No 2, Nikisha Industrial Estate, Pandurang wadi, Behind Samrat Hotel, National Highway no 8, Near Dahisar Check Naka, Dist Thane - 400107, Maharashtra, India

Regd. Office : E/603, Yudhistir Bldg., N.L. Complex, Anand Nagar, Dahisar (East), Mumbai - 400 068.

Telephone : 022 28453297 | 022 28453472, **Mobile :** 9833268605 | 9322278159 | 9833613011

Web-Site : www.autoonetrinity.com | www.trinitysales.tradeindia.com | www.indiamart.com/trinitysales

E-mail : sales@autoonetrinity.com / tss.trinity@yahoo.com



A PERFECT SMOOTH PAINTING SOLUTION FOR YOUR AUTOMOBILE

SPRAY PAINTING NEEDS.....



Filter Stages

i) Pre-Filters

Filter class	EU 3
Material	Synthetic Micro fiber
Thickness	22mm
Particle holding capacity	10 microns & above
Dust Holding Capacity	562.5 g/m ²
Rated Air Flow	2008 m ³ /hr

ii) Ceiling Filters

Filter class	EU 5
Material	Synthetic micro fiber
Thickness	22 mm
Particle Holding capacity	5 microns & above
Dust holding capacity	337 gms/m ²
Rated Air Flow	900 m ³ /hr

iii) Floor Filter

Material	Fiber Glass Media
Thickness	50-65mm
Paint holding capacity	3500-47—gms/m ²
Rated Air Flow	2500-2600 m ³ /hr

TECHNICAL SPECIFICATIONS OF PAINT BOOTH

Type of Paint Booth	Positive Pressure Paint Booth
Air Flow	Vertical Down Draft
Working Size of the Booth	Length : 7,500 mm Width : 3,950 mm Height : 2,600 mm
External Size of the Booth	Length : 7,630 mm Width : 4,050 mm Height : 3,500 mm
Size of Service Door	Height : 1,900 mm Width : 600 mm
Booth construction	Pre fabrication GI sheets fixing with bolt nuts. Removing easily.
Control Panel	Digital Temperature readout and timer.
Illumination	Top Left – 4 sets (40W tubes 4 Nos. in each set) Right – 4 sets (40W tubes 4 Nos. in each set)
Air Inlet Blower	Double Inlet Forward Curved Fan for Silent function. 22,000 m ³ /hr; 7.5HP motor; 1440 rpm, 3phase, 415V.
Exhaust blower	Double inlet Forward curved fan for silent function 22,000m ³ /hr, 5hp motors, 1440rpm.
Heat Exchanger	Made of Stainless Steel
Type of Burner	Automatic (Imported)
Heat output at full load	1,00,000 K.Cal/hr.
Fuel	HSD

TECHNICAL SPECIFICATIONS DETAILS OF PAINT BOOTH

Parts Name	Model	Technical Parameters	Manufacturer	Application
Fan	GIN 80	Air Volume : 25000 m3 / hr Pressure : 600Pa Rpm : 800 rpm Rated power : 5 KW Dimension : 510dia x 510mm Qty : 1 nos	Air Flow Industries	Air Supply System
Electrical Motor	7.5 HP Industrial Motor	Power : 5KW Rate current : 12A Volts : 440V Rpm : 1440rpm Qty : 1 nos	Kirloskar or L&T	Fan driving
Burner	Max 4	Model : Miner 4 Heat Value : 180000cal/h Motor Power : 0.4KW Electrical Current : 2 Amps Qty : 1 nos	Eco Flam	Main heat system
Heat Exchanger	PB-180	Power : 180 KW Out gauging pipe : 180 mm Heat exchange efficiency: 80%	Vishnu Engg.	Main heat system
Lamp Illumination	L36W	Illumination Flux : 200lm Color : Daylight color Power : 36W Qty : 32 nos	Philips	Body Light
Ceiling filter	F5	Size : 1440mm x 1045mm Filter Grade : F5 Qty : 10 nos	Labletex	Ceiling air filters
Temperature Control with timer	Premium	Temperature range : 0-200° C Power : 220 Volts, AC 50/60 Hz Timer : Auto cut off system Qty : 1 nos	Poineer Industries	Temperature control
Insulation	Glass	Thick : 50 mm heating resistance power	Rock wool India pvt Ltd.,	Heat Controller
Contacts	C32	32Amps contactor Delta and timer Qty : 2 sets with Relay	Siemen's	System, Controller

*In view of our policy of continuous Research & Development on our product. Trinity Sales & Service reserve the right to alter specification or design without prior notice and liability.



TRINITY SALES & SERVICES



Admin & Works : Unit No 2, Nikisha Industrial Estate, Pandurang wadi, Behind Samrat Hotel, National Highway no 8, Near Dahisar Check Naka, Dist Thane - 400107, Maharashtra, India

Regd. Office : E/603, Yudhistir Bldg., N.L. Complex, Anand Nagar, Dahisar (East), Mumbai - 400 068.

Telephone : 022 28453297 | 022 28453472, **Mobile :** 9833268605 | 9322278159 | 9833613011

Web-Site : www.autoonetrinity.com | www.trinitysales.tradeindia.com | www.indiamart.com/trinitysales

E-mail : sales@autoonetrinity.com / tss.trinity@yahoo.com



AO 15




AO 30



AO 60

Model	AS 15	AS 30	AS 60
Pull of vacuum	210mbar	230mbar	250mbar
Capacity	15L	30L	60L
Voltage	220v-240v	220v-240v	220v-240v
Barrel diameter	345mm	345mm	440mm
Power	1000w	1000w	2000w
Height	550mm	760mm	1000mm
Rate of gas flow	48L/S	53L/S	53L/S
Length of cable	7m	7m	7m
Certificate	CE	CE	CE

AIR COMPRESSORS

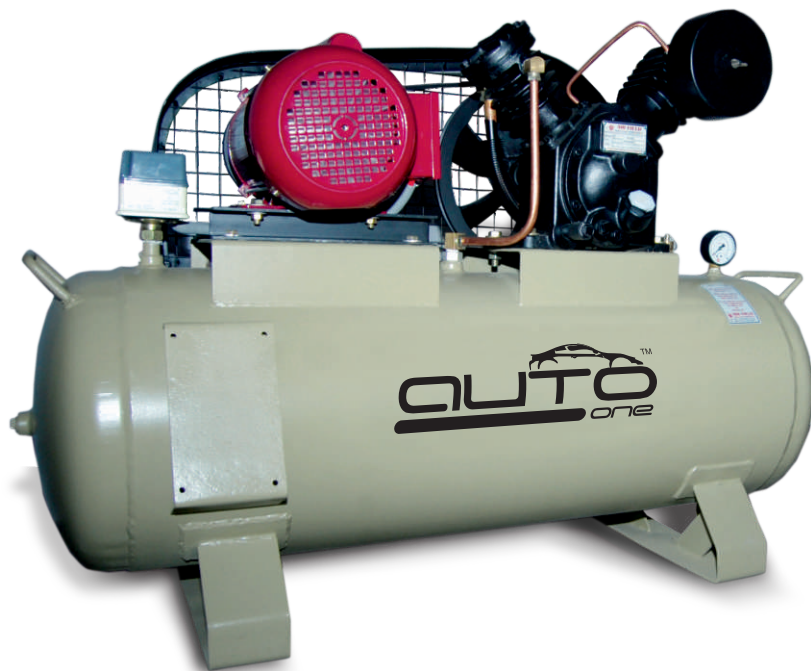

Available in three Phase, Single phase from 3HP to 20 HP
Multi stage, Double Piston reciprocating type with all
standard Fittings

VACUUM CUM STEAM CLEANER



SV 3000 multifunctions

✓ Vacuum Wet & Dry
✓ Steam cleaner

5 filtering level

Code	8.406.0010
	8013298070930
	148° C
	4,5 bar - steam 50 gr/min
	240 mbar - 24 kPa
	1200 W (max 1400 W) - 230/240 V ~ 50 Hz
	1700 W
	9 Kg
	55 x 39,5 h50,5 cm.
	16 Pz
	20 feet: 176 Pz - 40 feet: 400 Pz



14-04-2009



auto
one
Inspiring autoworld





Feature

High carbon steel side plates for increased chassis strength .

Wide front wheels and ball bearing mounted rear caster wheels for stability and easy maneuverability.

Two piece handle with knurled hand grip provides non-slip ease of pumping and longer reach under the vehicle.

Overload and bypass safety valves prevent the jack from being used beyond its rated capacity and ram over extension.

Model #	Capacity (tons)	Low Height (mm)	Lift (mm)	Max.Height (mm)	N.W (KG)	Package size (cm)	QTY/CTN (PCS)	GW/CTN (KG)
80401	2.25	135	365	500	29.5	68× 38× 20	1	31
80402	2.50	135	365	500	33.5	68× 38× 20	1	35
80403	3	140	380	520	36	77× 39× 21	1	38
80403Q	3	140	380	520	36	77× 39× 21	1	39
80404	2.50	100	370	470	29.5	67× 36.5× 19	1	31
80405	3	100	380	480	38.5	72× 41× 20	1	40

Feature

Heavy gauge steel side plates prevent twisting.

Front wheels with roller bearings and ball bearing mounted rear caster wheels provide stability and easy maneuverability.

Heavy duty pumps, rams, and cylinders are precision machined and inspected to ensure long service life and superior performance

Overload and bypass safety valves prevent the jack from being used beyond its rated capacity and ram over extension

Foot pump pedal raises the lift arm to the load quickly and "T" handle pumps jack under load

Model #	Capacity (tons)	Low Height (mm)	Lift (mm)	Max.Height (mm)	N.W (KG)	Package size (cm)	QTY/CT N (PCS)	G.W (KG)
80502	2	140	660	800	62	126× 44× 21	1	66
80503	3	145	465	630	63	126× 39× 23	1	67
80505	5	160	400	560	97	156× 40× 28.5	1	107
80510	10	170	400	570	140	169× 50× 33.5	1	151
80520	20	190	430	620	295	175× 52× 35	1	310



Shop Crane

For raising, lowering and transporting of automotive engines and other heavy shop loads.

Feature

High capacity engine crane with added boom length, enabling it to be used on vehicles with long front ends where an extra long reach is required

Roller-bearing swivel casters with safety brakes to secure positioning

Legs and boom can be folded quickly and easily to save space when not in use

Model #	Capacity (ton)	Lifting range (mm)	N.W (KG)	G.W (KG)
81001	1	0-2300	65	68
81002	2	0-2380	83	85
81003	3	0-2200	113	118



*In view of our policy of continuous Research & Development on our product.Trinity Sales & Service reserve the right to alter specification or design without prior notice and liability.



TRINITY SALES & SERVICES

Admin & Works : Unit No 2, Nikisha Industrial Estate, Pandurang wadi, Behind Samrat Hotel, National Highway no 8, Near Dahisar Check Naka, Dist Thane - 400107, Maharashtra, India

Regd. Office : E/603, Yudhistir Bldg., N.L. Complex, Anand Nagar, Dahisar (East), Mumbai - 400 068.

Telephone : 022 28453297 | 022 28453472, **Mobile :** 9833268605 | 9322278159 | 9833613011


Web-Site : www.autoonettrinity.com | www.trinitysales.tradeindia.com | www.indiamart.com/trinitysales

E-mail : sales@autoonettrinity.com / tss.trinity@yahoo.com



MIGWELDING AOFOX SERIES

AOFOX 160, AOFOX 170, AOFOX 180, AOFOX 181, AOFOX 185 Flex-line, AOFOX 190

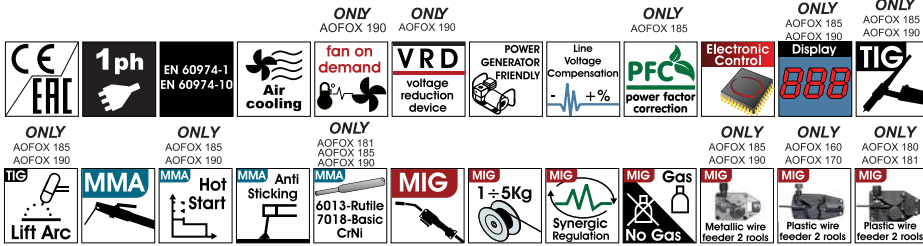


OPTIONAL Trolley



AOFOX is the new line of compact lightweight, microprocessor-controlled welding inverters suitable for MIG/MAG, MMA and TIG welding processes. AOFOX is the ideal range for more experienced welders operating also in non-industrial working conditions. Optimum performances in welding with all models: in manual and synergic mode for the AOFOX 160, 170 and 180, in auto-synergic mode for the AOFOX 185/190s. The “synergy” helps the novice user to adjust correctly the welding parameters: simply select the desired combination between wire diameter, gas type and thickness to be welded; and the wire speed will be adjusted automatically by the machine. The units AOFOX 180 and 190 are equipped with Eurobinzel torch connector, while the AOFOX 160 and 170 are supplied with fixed connection torch. Mig welding capability for model AOFOX 160. The units AOFOX 170 and 180 offer the possibility to weld in MIG and MMA (electrodes 6013), while the source AOFOX 185/190s, in addition to the MIG and MMA welding processes (electrodes 6013, 7018), is also suitable for TIG welding.

		AOFOX160 AOFOX170S				AOFOX185 Flex-Line						AOFOX190S		
		AOFOX180S, AOFOX181S												
		230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	230V 50/60Hz	115V 50/60 Hz			230V 50/60Hz					
		2,2	3,5	3,5	3,5	1,9			2,8					
Power 60% KVA						MMA 65	TIG 65	MIG 26	MMA 65	TIG 65	MIG 26	MMA 58	TIG 58	MIG
Uo V		24	26/40	25/40	25/40	10 ÷ 110	35 ÷ 10	30 ÷ 130	10 ÷ 160	35 ÷ 160	30 ÷ 170	5 ÷ 175	5 ÷ 175	
mp. Min - Max A		25 ÷ 150	25 ÷ 170	25 ÷ 170	25 ÷ 170	105 / 25%	105 / 25%	130 / 25%	160 / 20% 90 / 60%	160 / 20% 90 / 60%	170 / 25% 110 / 60% 85 / 100%	20%175 60%100 100%80	25%175 60%115 100%90	20%180 60%115
Amp.60974-1 A		60% 130 60% 80 100% 65	60% 170 60% 110 100% 85	60% 170 60% 110 100% 85	60% 170 60% 110 100% 85									
Aluminium Ø mm		0,8	0,8 ÷ 1,0	0,8 ÷ 1,0	0,8 ÷ 1,0			0,8 ÷ 1,0				-	-	0,8 ÷ 1,0
Steel Ø mm		0,6 ÷ 0,8	0,6 ÷ 1,0	0,6 ÷ 1,0	0,6 ÷ 1,0			0,8 ÷ 1,0				-	-	
Fluxcore Ø mm		0,8	0,8 ÷ 1,0	0,8 ÷ 1,0	0,8 ÷ 1,0			0,8 ÷ 1,0				-	-	
Stainless Steel Ø mm		0,8	0,8 ÷ 1,0	0,8 ÷ 1,0	0,8 ÷ 1,0			0,8 ÷ 1,0				-	-	0,8 ÷ 1,0
Brazing Ø mm		0,8	0,8 ÷ 1,0	0,8 ÷ 1,0	0,8 ÷ 1,0			0,8 ÷ 1,0				-	-	
Ø Electrode Ø mm		1,6 ÷ 3,25	1,6 ÷ 3,25	1,6 ÷ 3,25	1,6 ÷ 3,25			1,6 ÷ 3,25				1,6 ÷ 4	-	-
electrode TYPE		6013	6013	6013	6013-7018-CrNi	6013-7018-CrNi						6013-7018-CrNi		
Insulation		H	H	H	H	H						H		
Protec. Degree		IP22S	IP22S	IP22S	IP22S	IP22 S						IP22S		
mm (LxVxH)		480X220X385	480X220X385	480X220X385	480X220X385	480X385X220						480X220X385		
mm (LxVxH)		590X260X455	590X260X455	590X260X455	590X260X455	685X450X275						590X260X455		
kg		10	11	11,5	11,5	25 3 (11,5)						11		

DENT PULLER SPOT CAR AO4000 - AO5000




Optional Trolley / Wave Wire Kit

Multifunction Spotter ideal for quick works on car body, controller by microprocessor easy and fast setting through synergic programs for welding washers, rivets, wavy wires, heating function included. Automatic start contact system or manual. Supplied with gun, earth cable, Kit accessories included: Hammer, 10 pieces three point washers kit, cylindrical head for three point washers, carbon electrode.

		SPOTCAR AO 4000	SPOTCAR AO 5000
	(1 ph)	230V 50/60Hz	400V 50/60Hz
Power 50%	KVA	2,5	6
Max peak power	KVA	13	13
Delayed Fuse	A	T16	T20
Uo	V	8	7,5
Amp. Out	A	2850(2%)	3600(3,5%)
Amp out Max	A	3200	5000
Insulation	-	H	H
Protec. Degree	-	IP22S	IP22S
	mm (LxWxH)	345x250x280	345x250x280
	mm (LxWxH)	400x560x410	400x560x410
	kg	18	27

ALUMINIUM DENT PULLER SPOT CAR ALU



Spot Car Alu is a power source for capacitor discharge welding of studs from M3 to M6. Particularly suitable for quick repairs on aluminium bodywork. Controlled by a microprocessor. It is equipped with an advanced safety system that allows the discharge of the capacitor only when in contact with the piece.

		SPOTCAR ALU	SPOTCAR ALU AO 66
	(1 ph)	230V 50/60Hz	230V 50/60Hz
Fuse	A	T10	T10
Uo	V	12	12
C	uF	33000	66000
E	Joule Max	650	1500
Ts	ms	1	1,5
	mm	3 - 6	3 - 8
	mm (LxWxH)	310x295x175	345x250x280
	mm (LxWxH)	360X420X350	400x560x410
	kg	11	14,6



Optional Trolley

Optional Pull System

*In view of our policy of continuous Research & Development on our product. Trinity Sales & Service reserve the right to alter specification or design without prior notice and liability.



TRINITY SALES & SERVICES







Regd. Office : E/603, Yudhistir Bldg., N.L. Complex, Anand Nagar, Dahisar (East), Mumbai - 400 068.

Telephone : 022 28453297 | 022 28453472, Mobile : 9833268605 | 9322278159 | 9833613011

Web-Site : www.autooneindia.com | www.indiamart.com/trinitysales

E-mail : sales@autooneindia.com / tss_trinity@yahoo.com

CAR JACK LIFT MODEL AO3000 (PORTABLE)

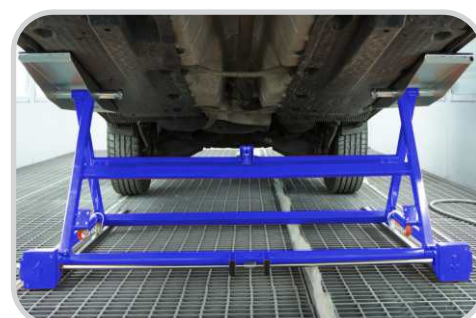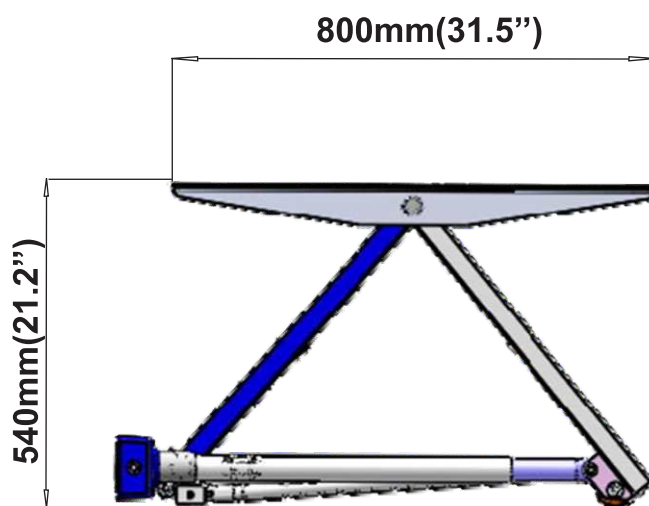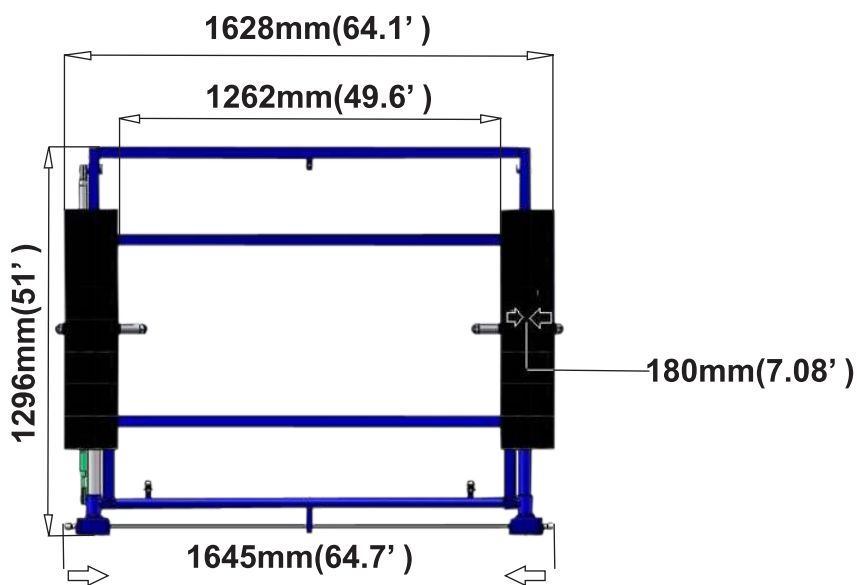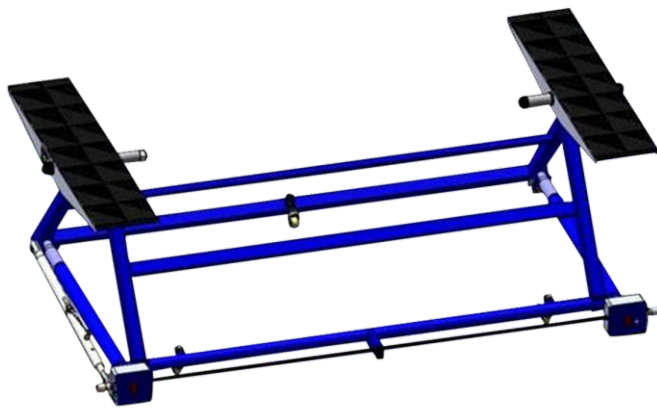

Features and Specification

1. This is a Portable lift with lift in tilt position this lift helps the user to create a working bay any where in the workshop or outside workshop.
2. Stated Load Capacity 2.5ton. the lift is tilt type lift when lifted from the Center of the vehicle.
3. The overload capacity of this lift is 1.5 times the stated value that is to say that its maximum loading capacity is able to withstand at least 3.75 tons.
4. To ensure its smooth operation & achieve labor saving purpose, all the parts are made with high degree of precision.
5. In order to make the construction of this lift more durable, all the parts are weld with precision welding in order to bear the load, the material of the shaft bearing & their hardness is also taken care in this process.
6. Minimum height of this lift is 115mm so it's very easy to slide under a car having low ground clearance for Sports car shallow Ramps for extra height can be used.
7. It consists of 3 additional rotatable wheels, this allow for easier transport & need not be removed as they will automatically retract under Pressure after lifting.
8. It is also fitted with an antitravel device so that it is safe to use.
9. The car jack lift uses gearing system and applies leverage, according to leverage the user will not feel labour saving until the platforms are lifted up to around 210mm to make the base form a triangle when used with the crank to operate the lift manually
10. For quick lift you can use a electric drill to lift the machine. This drill should be high torque with low RPM e.g. 850 RPM 1000W. (Optional : drill machine and roller tracks)
11. The lift is very compact & very safe in use. Weight of the lift is only 63kg so only one person is required to move it or use it.
12. Ideal for body shop, paint booth, Tyre shop, Mechanical jobs & car washing etc.
13. The platforms are retractable which makes it useful to be used for all kinds of vehicles.
14. No expensive electrical fittings or hydraulic system is used.
15. Zero maintenance and zero down time. And maximum productivity.

*In view of our policy of continuous Research & Development on our product. Trinity Sales & Service reserve the right to alter specification or design without prior notice and liability.



TRINITY SALES & SERVICES



Regd. Office : E/603, Yudhistir Bldg., N.L. Complex, Anand Nagar, Dahisar (East), Mumbai - 400 068.

Telephone : 022 28453297 | 022 28453472, **Mobile :** 9833268605 | 9322278159 | 9833613011

Web-Site : www.autooneindia.com | www.indiamart.com/trinitysales

E-mail : sales@autooneindia.com / tss_trinity@yahoo.com

PUC MACHINE 4 GAS ANALYZER

Auto-One CCD wheel aligner is stable, accurate, low cost, and easy-to-maintain 8 CCD wheel aligner, specially designed for clients who need to expand their business. With featured zigbee wireless data transfer technology, Auto-One CCD is more Stable and advanced than bluetooth or 433MHz RF equipped wheel aligners.

Professional

- ▶ High accuracy
- ▶ 6 meter wheel base
- ▶ 8 toe sensors
- ▶ Fast & stable data transfer
- ▶ 24 inch clamps
- ▶ Super large databank

Affordable

- ▶ Best price/performance ratio

Flexible

- ▶ PC-free mode
- ▶ Automatic detect low chassis
- ▶ Interchangeable sensor heads
- ▶ Two wheel mode(Front)

Specification


Item	Precision	Range
Front Total Toe-in	$\pm 4'$ ($\pm 0.02^\circ$)	$\pm 20^\circ$
Camber	$\pm 2'$ ($\pm 0.01^\circ$)	$\pm 20^\circ$
Caster	$\pm 6'$ ($\pm 0.1^\circ$)	$\pm 20^\circ$
SAI/KPI	$\pm 6'$ ($\pm 0.1^\circ$)	$\pm 20^\circ$
Setback	$\pm 2'$ ($\pm 0.03^\circ$)	$\pm 5^\circ$
Thrust Angle	$\pm 2'$ ($\pm 0.03^\circ$)	$\pm 6^\circ$

Note: The above accuracy can be confirmed only when the user follows the specified operation procedures as instructed in the user manual.

Requirements on Surroundings

Ambient Temperature - $20^\circ\text{C} \sim + 50^\circ\text{C}$
Relative Humidity $\leq 90\%$


Accessories



Turntable



Steering Wheel Holder



Break pedal depressor



24-inch wheel clamps

DIESEL SMOKE METER

Auto-One CCD wheel aligner is stable, accurate, low cost, and easy-to-maintain 8 CCD wheel aligner, specially designed for clients who need to expand their business. With featured zigbee wireless data transfer technology, Auto-One CCD is more Stable and advanced than bluetooth or 433MHz RF equipped wheel aligners.

Professional

- ▶ High accuracy
- ▶ 6 meter wheel base
- ▶ 8 toe sensors
- ▶ Fast & stable data transfer
- ▶ 24 inch clamps
- ▶ Super large databank

Affordable

- ▶ Best price/performance ratio

Flexible

- ▶ PC-free mode
- ▶ Automatic detect low chassis
- ▶ Interchangeable sensor heads
- ▶ Two wheel mode(Front)

Specification

Item	Precision	Range
Front Total Toe-in	$\pm 4'$ ($\pm 0.02^\circ$)	$\pm 20^\circ$
Camber	$\pm 2'$ ($\pm 0.01^\circ$)	$\pm 20^\circ$
Caster	$\pm 6'$ ($\pm 0.1^\circ$)	$\pm 20^\circ$
SAI/KPI	$\pm 6'$ ($\pm 0.1^\circ$)	$\pm 20^\circ$
Setback	$\pm 2'$ ($\pm 0.03^\circ$)	$\pm 5^\circ$
Thrust Angle	$\pm 2'$ ($\pm 0.03^\circ$)	$\pm 6^\circ$

Note: The above accuracy can be confirmed only when the user follows the specified operation procedures as instructed in the user manual.

Requirements on Surroundings

Ambient Temperature - $20^\circ\text{C} \sim + 50^\circ\text{C}$
Relative Humidity $\leq 90\%$


Accessories



Turntable



Steering Wheel Holder



Break pedal depressor



24-inch wheel clamps



High-Pressure Piston Pumps



Watergate high-pressure piston pumps are positive displacement crankshaft high pressure pumps which incorporates ceramic pistons and high quality seats and seals. These pumps are coupled directly on to the motor shaft for direct power with high torque, this makes sure that the machines works smoothly.

Watergate pumps are designed and built for the pumping of clean fresh water or water with a low percentage of commonly used detergents, up to a temperature of 65°C. watergate pumps are designed to be used in Automobiles, food, chemical and pharmaceutical industries

Features and specifications

- Water gate pumps are manufactured in configuration of 6 different models.
- These models have different pressure and power specification.
- These pumps are made in different models with pressure ranging from 120 bars to 200 bars with power ratings of 3 phase and 1 phase using motors from 3 hp to 5 hp @ 1450 RPM and water delivery ranging from 10 to 15 L/M depending on the type of pump and motor used
- These pumps incorporate an unloader valve with a bypass system and a regulator for maximum safety and adjusting the pressure to desired levels.
- It also consists of pressure switch which makes sure that the pump stops working whenever the trigger is released during idle condition.
- It consists on a chemical injector to apply soap on the Surface to be cleaned.
- It comes with 10 meter standard high pressure hose with 600mm lance and a nozzle.
(Optional: foam lance/ extra hose pipe)

All 3 phase machines comes with a motor starter and for single phase machine tripper has to provide by the customer.

Model	Max pressure	Working pressure	FLOWRATE L/M	US GPM	RPM	MOTOR HP	MOTOR KW.
WGH1231	120BARS	100BARS	10	2.6	1450	3h 1Ø	2.2
WGH1233	120BARS	100BARS	10	2.6	1450	3h 3Ø	2.2
WGH1533	150BARS	120BARS	8.5	2.2	1450	3h 3Ø	2.2
WGH2035	200BARS	170BARS	10	2.6	1450	5h 3Ø	3.8

PLEASE NOTE:

Machine can also be made as per customer's special needs and requirements as per customers specifications.

CAR WASHER ACCESSORIES



AUTOMATIC CAR WASH



AUTOMATIC CAR WASH



AUTOMATIC CAR WASH



AUTOMATIC CAR WASH



AUTOMATIC CAR WASH



AUTOMATIC CAR WASH



AUTOMATIC CAR WASH



Vehicle Body Shampoo Cleaner (Concentrated Economy)

Vehicle Body Shampoo Cleaner (ECONOMY)



INTRODUCTION

Jordan's car body shampoo with "Maxi foam technology" is a highly concentrated cleaning chemical specifically formulated to be used in conjunction pressure washers/foamer / nebulizer.

It is a precise mixture of powerful detergents, emulsifiers, wetting agents, water conditioners and rinse additives for rapid, thorough and economical cleaning of small and large vehicles of any kind of metallic or painted surface. This product will clean and dissolve grease, oils, road film, insect residues, smoke and soot and similar kinds of accumulated debris from automobiles, large and small transport trucks, trailers, buses, taxis, boat, planes and farm equipment's etc. When used with suggested dilution this product provides effortless cleaning, rapid penetration through layers of buildup giving streak free rinsing of the surface.

This chemical safely cleans road film from expensive automotive finishes without damaging the surface.

HOW TO USE

The chemical supplied is in concentrated form and has to be diluted with water as follows.

- 1) Using pressure washer : mix 1:50
- 2) For using with Foam bottle: mix 1:10
- 3) Using with nebulizer: mix 1:50
- 4) For Using with bucket : 1:200 upto 1:400 for rinse free washing.

Apply the desired quantity on the surface, let it react with the surface for 60 seconds and then clean with microfiber cloth from Top to bottom. And then clean with high pressure washer followed by drying with a microfiber cloth.

INGREDIENTS

This product is made of best quality materials which are Biodegradable and safe for hands. It consists of Anionic tensides, nonionic tensides, amphoteric, fragrance

Other ingredients: Alkali, water based solvent, additives.



Authorised Distribution Partner:

HO: Unit No. 6&7, Building - 7, Gulmohor Building, Greenways Complex, Mahajanwadi, Western Express Highway No. 8, Mira Road E, Thane - 401104. Mumbai, Maharashtra, India. **T:** +91-22-28443297/28453472, **Email:** sales@jordan.co.in

DOT TECHNOLOGY

Power Base konzentrat (Premium Qualität Reiniger)

Power Base Concentrate (Premium Quality Cleaner)

GERMAN ENGINEERED...



INTRODUCTION

Jordan presents for the first time a premium concentrate cleaner

This is the first of its kind product in the cleaning Industry which can be defined as a

MOTHER CONCENTRATE BASE which can be used to manufacture various kinds of different cleaning product solution by just varying the proportion of water to be mixed.

IN This way one can make cleaners for different applications with ease.

POWER BASE was developed by our chemical engineers through years of trials and testing's and a final concentrate was ultimately produced. This product is made of best premium quality chemicals which were procured from reliable vendors.

HOW TO USE

Due to its unique versatility this concentrate can be used to make different products by mixing water as follows.

1) Car body : as surface preparation/cleaning etc

- With foam gun mix 1:5
- As waterless wash and wax : 1:5 with sprayer
- With pressure washer 1:10
- With Nebulizer 1:25
- With bucket 1:100 – 1-300 for rinse less wash.

2) Mixing this concentrate 1-5 to 1:10 with water one can make following product which can be used and applied using SPRAY BOTTLES.

- Interior car cleaner /shiner/ refresher for dashboard/doors/chrome/vinyl/fabric
- Leather cleaner and refresher
- As an Disinfectant and cleaner for Carpets /fabrics
- Rim cleaner
- Engine Degreaser
- Road film Remover
- Wash and wax body spray
- Odor Remover.
- Waterless car wash.....AND MANY MORE products for housekeeping services, hospitals, hotel, home service etc.

3) Mixing this concentrate 1:1000 can make Glass cleaner for various types.

INGREDIENTS

It consists of Anionic tensides, nonionic tensides, amphoteric, fragrance

Other ingredients: Alkali, water based solvent, additives



Authorised Distribution Partner:

HO: Unit No. 6&7, Building - 7, Gulmohor Building, Greenways Complex, Mahajanwadi, Western Express Highway No. 8, Mira Road E, Thane - 401104. Mumbai, Maharashtra, India. **T:** +91-22-28443297/28453472, **Email:** sales@jordan.co.in

DOT TECHNOLOGY

Premium Polymer Polish (Final-Shine)

Premium Polymer Polish (Final-Shine)



Premium Polymer Polish (Final-Shine)

This is a premium polish made with premium quality polymers and carnauba wax.

This ultra gloss polish uses extremely fine polishing agents to eliminate swirl marks and hairline scratches while preparing a blemish free surface for final finishing. Provides longer buffing time to create an exceptionally high gloss, glass-like appearance. For hand or machine use. Safe for all types of paint finishes.

This polish is the semi liquid form and can be sprayed or applied with a sponge on the surface.

Once applied the polish has to apply evenly on the surface with an applicator and after few minutes of drying the surface can be buffed to a lasting glossy wet effect.

This polish can be used for quick detailing of the vehicle in a very short time with results never forgotten by the customer.



Authorised Distribution Partner:

HQ: Unit No. 6&7, Building - 7, Gulmohor Building, Greenways Complex, Mahajanwadi, Western Express Highway No. 8, Mira Road E, Thane - 401104. Mumbai, Maharashtra, India. **T:** +91-22-28443297/28453472, **Email:** sales@jordan.co.in

DOT TECHNOLOGY

Car Interior Detailer (Finish-Master)

**Car Interior Detailer
(Finish-Master)**



Car Interior Detailer (Finish-Master)

Jordan interior detailer is an product with outstanding gloss quality and refresher with premium light perfume.

This product is used as the finalization of the interiors after cleaning and vacuuming of the CAR interior.

This product is made of premium polymer coating with a gloss which is not disturbing to eyes while driving.

Once applied this product gives an interior finish same as that of a new car. This product can be also used to refresh any kind of rubber/plastic/vinyl material.



Authorised Distribution Partner:

HO: Unit No. 6&7, Building - 7, Gulmohor Building, Greenways Complex, Mahajanwadi, Western Express Highway No. 8, Mira Road E, Thane - 401104. Mumbai, Maharashtra, India. **T:** +91-22-28443297/28453472, **Email:** sales@jordan.co.in

DOT TECHNOLOGY

Rubbing Compound (Premium) Top Cut

Rubbing Compound
(Premium) Top Cut



Rubbing Compound (Premium) Top Cut

JORDAN TOP-CUT is formulated to deliver outstanding scratch removal performance and a high gloss finish on all paint types – new or old. TOP-CUT reduces process time by efficiently removing scratches and paintwork defects, is quick to clean up and leaves a high clarity, deep gloss shine. Can be used for a wide variety of paint rectification applications; bodyshop, detailers, new/used car retailers, industrial, furniture, marine etc.

TOP-CUT has been designed to work with most types of polishing foam mops and for greater cut can be used with lambswool buffing pads.



Authorised Distribution Partner:

HO: Unit No. 6&7, Building - 7, Gulmohor Building, Greenways Complex, Mahajanwadi, Western Express Highway No. 8, Mira Road E, Thane - 401104. Mumbai, Maharashtra, India. **T:** +91-22-28443297/28453472, **Email:** sales@jordan.co.in

DOT TECHNOLOGY